

The **BA324E loop powered 4/20mA indicator** is a fourth generation field mounting instrument that is electrically and mechanically compatible with the earlier BA324D. It has a much larger full 5 digit display and guaranteed performance between -40 and 70°C. Like its predecessor, the BA324E is housed in a robust IP66 enclosure with a separate terminal compartment.

Main application of the BA324E is to display a measured variable in meaningful engineering units within a hazardous area. The zero and span of the display are independently adjustable allowing the indicator to be calibrated to display any linear variable represented by the 4/20mA signal. A root extractor and an adjustable sixteen segment lineariser enable the indicator to display flow and non linear variables such as tank level in linear engineering units. For weighing applications a tare function is included.

The **bold 29mm** high 5 digit display and 31 segment bargraph provide maximum contrast and have a very wide viewing angle, allowing the BA324E indicator to be easily read in most lighting conditions over a wide temperature range. An optional factory fitted backlight is available for installations in poorly illuminated areas. The five digits, with four decimal points and a negative sign, may be configured to display any variable between -99999 and 99999.

The **robust GRP enclosure** has stainless steel fittings, silicone gaskets and an armoured glass window providing IP66 protection between -40 and 70°C. Ingress and impact protection have been independently assessed by Intertek. A separate terminal compartment allows the instrument to be installed and terminated without exposing the display electronics. To further simplify field wiring and subsequent inspection, the terminal cable entries and clamping screws are forward facing. Additional terminals are provided which may be used for linking the return 4/20mA conductor and the cable screens.

International intrinsic safety certification permits the BA324E to be installed throughout the world. The 4/20mA input terminals comply with the requirements for *simple apparatus* which, together with the low voltage drop, allow the indicator to be connected in series with most intrinsically safe 4/20mA loops. The BA324E may also be installed in dust hazardous areas. All input safety parameters are the same or greater than those for the preceding BA324D, thus allowing the BA324E to safely replace the earlier model.

A **backlight** which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop no additional intrinsically safe interface or wiring is required and the indicator input remain compliant with the requirements for *simple apparatus*. Powering from a separate supply produces a brighter backlight but requires an additional intrinsically safe interface and field wiring.

Optional dual alarm outputs which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves, are available as a factory fitted option. The two galvanically isolated solid state outputs may be independently conditioned as high or low alarms with normally open or closed outputs. Annunciators on the display show the status of both alarm outputs.

Reliability is ensured by component conformal coating, protection from incorrect connection and radio frequency interference. The indicator has been subjected to extensive vibration testing and is supported by a three year guarantee.

Other field mounting models in this range include the BA304E which has a similar specification and an even larger four digit 34mm high display.

BA324E

2-wire 4/20mA

5 digit indicator

Intrinsically safe for use in all gas & dust hazardous areas

- ◆ Loop powered only 1.2V drop.
- ◆ 5 digit 29mm high display & 31 segment bargraph.
- ◆ Intrinsically safe ATEX gas or ATEX gas & dust or FM, cFM & ATEX gas All versions have IECEx certification.
- ◆ IP66 GRP enclosure with separate terminal compartment.
- ◆ Root extractor and 16 segment lineariser.
- ◆ Optional backlight, alarms & external keypad.
- ◆ 3 year guarantee



BEKA

associates


Sales & Support Distributor:-

Stockshed Limited. Stonecroft House,
Mud Lane, Eversley. Hampshire.
RG27 0QS. U.K. Tel. (0118) 9734955
e-mail info@stockshed.com


SPECIFICATION

| | |
|----------------------------|---|
| Input | |
| Current | 4 to 20mA |
| Voltage | Less than 1.2V at 20°C Less than 1.3V at -40°C |
| Overrange | Less than 5V with optional loop powered backlight ±200mA or ±30V will not damage the indicator |
| Display | |
| Type | Liquid crystal, non-multiplexed 5 digits 29mm high & 31 segment bargraph. |
| Span | Adjustable between 0 & ±99999 for a 4/20mA input |
| Zero | Adjustable between 0 & ±99999 with 4mA input |
| Decimal point | 1 of 4 positions or absent |
| Polarity | Automatic minus sign |
| Zero blanking | Blanked apart from 0 in front of decimal point |
| Direction | Display may increase or decrease with increasing 4/20mA input. |
| Reading rate | 2 per second |
| Bargraph | 31 segment 80mm long |
| Overrange | 99999 or -99999 with all decimal points flashing |
| Push buttons | |
| ▼ | (Function in display mode) Shows display with 4mA input |
| ▲ | Shows display with 20mA input |
| 'P' | Displays input in mA or a % of span, has a modified function when alarms are fitted. |
| 'E' | Used for tare function |
| Accuracy at 20°C | |
| Linear | ±0.02% of span ±1 digit |
| Root extracting | ±16µA at input ±1 digit |
| Temperature effect on: | |
| Zero | Less than 25ppm of span/°C |
| Span | Less than 50ppm of span/°C |
| Series mode rejection. | Less than 0.05% of span error for 1mA pk to pk 50 or 60Hz interference. |
| Intrinsic safety | |
| Europe ATEX | |
| Code | Group II Category 1GD Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP66- [Dust option, see How to order] Ta = -40 to 70°C |
| Input parameters | |
| Ui | 30V dc |
| Ii | 200mA |
| Pi | 0.84W |
| Output parameters | |
| Cert. No. | Complies with requirements for <i>simple apparatus</i> ITS11ATEX27253X (Special conditions only apply for installations in Zone 0) |
| USA FM | |
| Standard Code | 3610 Entity CL I, II, III: Div 1 GP A, B, C, D, E, F & G T5 @ 70°C |
| Standard Code | 3611 Nonincendive CL I, II, III: Div 2 GP A, B, C, D, E, F & G T5 @ 70°C |
| File | 3041487 |
| Canada cFM | |
| File | 3041487C |
| International IECEx | |
| Code | Ex ia IIC T5 Ga Ex ia IIIC 20 T80°C Da IP66- [Dust option, see How to order] Tamb = -40 to 70°C |
| Cert. No. | IECEX ITS11.0014X (Special conditions only apply for installations in Zone 0) |
| Environmental | |
| Operating temp | -40 to 70°C |
| Storage temp | -40 to 85°C |
| Humidity | to 95% at 40°C noncondensing |
| Vibration | Report available |
| Enclosure | IP66 |
| EMC | Complies with EMC Directive 2014/30/EU |
| Mechanical | |
| Terminals | Screw clamp for 0.5 to 1.5mm ² cable |
| Weight | 1.7kg |
| Accessories | |
| Backlight | Green, may be loop or separately powered |
| Loop powered | Indicator input voltage 5V |
| Separately powered. | 11V at 35mA from IS interface |
| Alarms | Two alarm outputs each of which may be independently configured as a high or low alarm contact with a NO or NC output. |
| Output | Isolated solid state switch complying with requirements for <i>simple apparatus</i> . |
| Ron | 5Ω + 0.7V max |
| Roff | 1MΩ min |
| External keypad | Membrane keypad enables indicator to be controlled without removing cover. |

DIMENSIONS (mm)

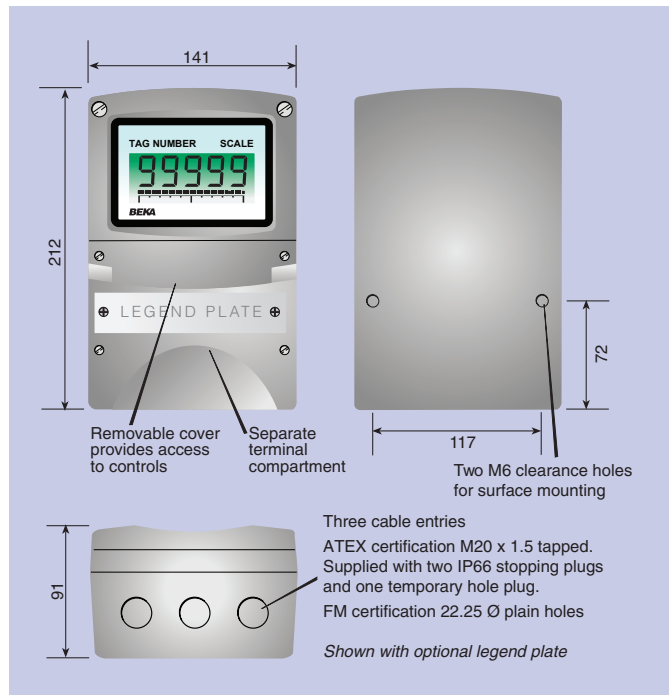

TERMINAL CONNECTIONS

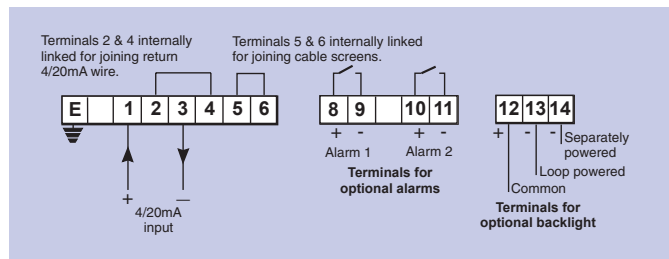

| | |
|------------------------------|---|
| Scale legend | Units of measurement marked onto display escutcheon. # |
| Tag legend | Tag number or application marked onto display escutcheon. # |
| Stainless steel legend plate | Etched legend plate with tag number or application attached to front of the instrument. # |
| Pipe mounting kit | BA392D or BA393 # |

See accessory datasheet for details

HOW TO ORDER

| | | |
|------------------------|-----------------------------------|---|
| Model number | Please specify | |
| Certification | BA324E |] All versions have IECEx certification. |
| | ATEX gas | |
| | ATEX gas & dust | |
| | FM, cFM & ATEX gas | |
| Display mode | Linear, root or lineariser* | |
| Display at: 4.000mA | XXXXX |] Include position of decimal point & XXXXX sign if negative, plus intermediate points if linearisation is required.* |
| 20.000mA | XXXXX | |
| Accessories | Please specify if required | |
| External keypad | External keypad | |
| Display backlight | Backlight | |
| Dual alarms | Alarms | |
| Escutcheon marking | | |
| Scale | Legend required | |
| Tag | Legend required | |
| Stainless legend plate | Legend required | |
| Pipe mounting kit | BA392D or BA393 | |

* Will be set to display 0.00 at 4mA and 100.00 at 20mA with a linear display if calibration information is not supplied. Can easily be recalibrated on-site.