

The BA304G loop powered 4/20mA indicator is an intrinsically safe field mounting instrument with a large 4 digit display housed in a robust IP66 GRP or stainless steel enclosure.

Main application of the BA304G is to display a measured variable in engineering units within a hazardous area. The zero and span of the display are independently adjustable allowing the indicator to be calibrated to display any linear variable represented by the 4/20mA signal. A root extractor and an adjustable sixteen segment lineariser enable the indicator to display flow and variables such as tank level in linear engineering units. For weighing applications a tare function is included.

The large 34mm high 4 digit display provides maximum contrast and has a very wide viewing angle, allowing the BA304G indicator to be easily read in most lighting conditions. An optional factory fitted backlight is available for installations in poorly illuminated areas. The four digits, with three decimal points and a negative sign, may be configured to display any variable between -9999 and 9999.

IP66 protection is provided by a robust GRP or 316 stainless steel enclosure, both have thick armoured glass windows and silicone gaskets. Impact and ingress protection have been assessed by UKAS accredited bodies. The BA304G is surface mounting but can be pipe or panel mounting using accessories.

IECEX, ATEX and ETL intrinsic safety gas and dust certification permit world wide installation. The 4/20mA input terminals comply with the requirements

for *simple apparatus* which, together with the low voltage drop, allow the indicator to be connected in series with most intrinsically safe 4/20mA loops.

Display backlighting which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop, no additional intrinsically safe interface or wiring is required and the indicator input remains compliant with the requirements for *simple apparatus*. Powering from a separate supply produces a slightly brighter backlight but requires an additional intrinsically safe interface.

Optional dual alarm outputs which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves, are available as a factory fitted option. The two galvanically isolated solid state outputs may be independently conditioned as high or low alarms with normally open or closed outputs. Annunciators on the display show the status of both alarms.

The scale card which shows units of measurement and tag information slides into an internal slot and can easily be changed on-site. New instruments can be supplied with the scale card printed to show customer specified information for no additional charge. If this is not requested, a blank card is fitted which can easily be marked on-site.

Reliability is ensured by protection from incorrect connection and radio frequency interference. The indicator has been subjected to extensive vibration and thermal testing and is supported by a three year guarantee.

BA304G BA304G-SS 2-wire 4/20mA 4 digit indicator

Intrinsically safe for use in all gas & dust hazardous areas

- ◆ IP66 GRP or stainless steel enclosure.
- ◆ Intrinsically safe ATEX, IECEX, ETL and cETL certification.
- ◆ Loop powered only 1.2V drop.
- ◆ 4 digit 34mm high display.
- ◆ Optional backlight & alarms.
- ◆ Root extractor, lineariser and tare function.
- ◆ Easy scale card installation on-site.
- ◆ 3 year guarantee



BEKA associates


Sales & Support Distributor:-

Stockshed Limited. Stonecroft House,
Mud Lane, Eversley. Hampshire.
RG27 0QS. U.K. Tel. (0118) 9734955
e-mail info@stockshed.com


SPECIFICATION

Input		
Current	4 to 20mA HART® transparent	
Voltage	Less than 1.2V at 20°C Less than 1.3V at -40°C Less than 5V with optional loop powered backlight	
Overrange	±200mA or ±30V will not damage the indicator	
Display		
Type	Liquid crystal, 4 digits 34mm high non-multiplexed	
Span	Adjustable between 0 & ±9999 for a 4/20mA input	
Zero	Adjustable between 0 & ±9999 with 4mA input	
Decimal point	1 of 3 positions or absent	
Polarity	Automatic minus sign	
Zero blanking	Blanked apart from 0 in front of decimal point	
Direction	Display may increase or decrease with increasing 4/20mA input.	
Reading rate	2 per second	
Overrange	9999 or -9999 with all decimal points flashing	
Push buttons		
	(Function in display mode)	
☑	Shows display with 4mA input	
☒	Shows display with 20mA input	
☐	Displays input in mA or as a % of span, has a modified function when alarms are fitted.	
☒	Used for tare function	
Accuracy at 20°C		
Linear	±0.02% of span ±1 digit	
Root extracting	±16µA at input ±1 digit.	
Temperature effect on:		
Zero	Less than 25ppm of span/°C	
Span	Less than 50ppm of span/°C	
Series mode rejection	Less than 0.05% of span error for 1mA pk to pk 50 or 60Hz interference.	
Intrinsic safety		
International IECEx		
Code	Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP66 -40°C ≤ Ta ≤ 70°C	
Input parameters		
Ui	30V dc	
Ii	200mA	
Pi	0.84W	
Output parameters	Comply with requirements for <i>simple apparatus</i>	
Cert. No.	IECEx ITS 11.0014X (Special conditions only apply for Zone 0)	
Europe ATEX		
Code	Group II	
Category	1GD	
	Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP66 -40°C ≤ Ta ≤ 70°C	
Safety parameters	As IECEx certification	
Cert. No.	ITS11ATEX27253X (Special conditions only apply for Zone 0)	
USA & Canada ETL & cETL		
Code	Class I, Div 1, Gp A, B, C, D, T5 Class I, Zone 0, AEx ia IIC T5 Ga -40°C ≤ Ta ≤ 70°C	USA & Canada USA
	Class II, Div 1, Gp E, F, G, Class III, Div 1 Zone 20 AEx ia IIIC T80°C Da -40°C ≤ Ta ≤ 60°C	USA & Canada USA
	Ex ia T5 Ga -40°C ≤ Ta ≤ 70°C Ex ia IIIC Da -40°C ≤ Ta ≤ 60°C	Canada
ETL control No.	4008610	
USA & Canada Nonincendive		
Code	Class I, Div 2, Gp A, B, C, D T5 Class II, Div 2, Gp F, G Class III, Div 2 -40°C ≤ Ta ≤ 70°C	
ETL control No.	4008610	
Environmental		
Operating temp	-40 to +70°C	
Storage temp	-40 to +85°C	
Humidity	to 95% at 40°C noncondensing	
EMC	Complies with EMC Directive 2014/30/EU	
Mechanical		
Enclosure		
Material	GRP or 316 stainless steel	
Ingress protection	IP66	
Impact protection	Enclosure 7J Window 4J	
Weight		
GRP	1.1kg	
Stainless steel	2.6kg	
Terminals	Blue with screw clamp for 0.5 to 1.5mm ² cable	
Scale card	Slide-in card showing units of measurement and tag information through display window.	

DIMENSIONS (mm)

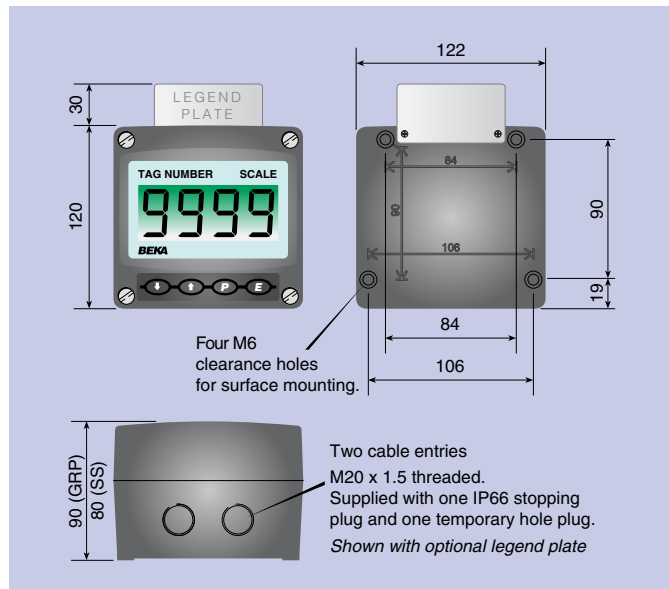

TERMINAL CONNECTIONS

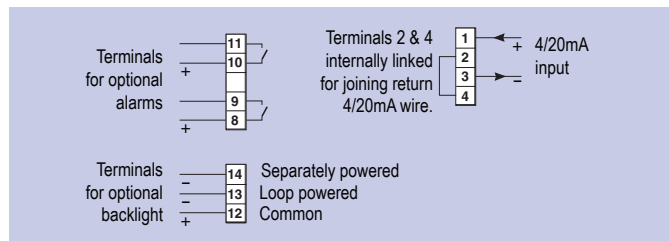

Accessories	
Backlight	Green, may be loop or separately powered
Loop powered	Indicator input voltage 5V
Separately powered	11V at 35mA from IS interface
Alarms	Two alarm outputs each of which may be independently configured as a high or low alarm contact with a NO or NC output.
Output	Isolated, voltage free solid state switch complying with requirements for <i>simple apparatus</i> .
Ron	5Ω + 0.7V max
Roff	1MΩ min
Legend plate	Stainless steel plate laser engraved tag number or application information attached to rear of the instrument, visible from the front. #
Pipe mounting kit	BA393G 316 stainless steel #
Panel mounting kits #	
For BA304G & BA304G-SS	
BA394G	Mounts indicator into an open panel aperture, does not seal aperture.
For BA304G	
BA494G	Mounts indicator into an open panel aperture & seals aperture
For BA304G-SS	
BA494G-SS	Mounts indicator into an open panel aperture & seals aperture
Back-box terminals	Including 4/20mA loop maintenance diode for BA304G.
# See accessory datasheet for details	

HOW TO ORDER

Please specify	
Model number	
GRP enclosure	BA304G
Stainless steel enclosure	BA304G-SS
Display mode	Linear, root or lineariser*
Display at:	
4.000mA	XXXX } Include position of decimal point & sign if negative.
20.000mA	
Scale card marking	
Units	Legend required
Tag	Legend required
Accessories	
Display backlight	Please specify if required Backlight
Dual alarms	Alarms
Stainless legend plate	Legend required
Pipe mounting kit	BA393G
Panel mounting kit	BA394G, BA494G or BA494G-SS
Back-box terminals	Back-box terminals