

The **BA314G** is a third generation intrinsically safe field mounting tachometer housed in a compact IP66 GRP enclosure. The tachometer is easy to use and can be configured on-site to operate with a magnetic pick-off, switch contact, proximity detector or open collector sensor. International intrinsic safety certification permits worldwide installation.

The **main application** of the BA314G is to measure and display rotational speed within a hazardous area. To assist with routine maintenance the BA314G tachometer includes a run-time clock that records the number of hours that the monitored machinery has been operating.

International intrinsic safety certification allows the BA314G tachometer to be installed in gas and dust hazardous areas worldwide. When configured to operate with a sensor having a voltage or magnetic pick-off output, the tachometer input terminals comply with the requirements for *simple apparatus* reducing system design and documentation.

The **display** has high contrast and a wide viewing angle, enabling the tachometer to be read in most lighting conditions over a wide temperature range. Speed may be displayed in almost any units of measurement per second, minute or hour. Run-time is shown on the lower display in hours with a tenth of an hour resolution. If not required the run-time display may be disabled.

Display backlighting which is internally powered from the tachometer is available as a factory fitted option. It provides green background illumination enhancing daylight viewing and allowing the display to be easily read at night or when installed in a poorly illuminated area.

IP66 protection is provided by the robust GRP enclosure which has stainless steel fittings, a silicone gasket and an 8mm thick armoured glass window. Ingress and impact protection have been independently assessed by Intertek.

The **scale card** which shows the tachometer's units of measurement and tag information slides into an internal slot and can easily be changed on-site. New instruments are supplied with a printed scale card showing customer specified information, if this is not supplied a blank card is fitted which can easily be marked on-site. For application requiring external marking an optional stainless steel legend plate is available.

The **isolated open collector pulse output** synchronously retransmits the tachometer's input pulse to other instruments. The retransmitted output pulse frequency may be divided and the output pulse width may be defined.

An **optional isolated 4/20mA current sink output**, which has been certified as a separate intrinsically safe circuit complying with the requirements for *simple apparatus*, may be configured to produce an output proportional to any part of the speed display.

Optional dual alarms can switch hazardous area loads such as a sounder or solenoid valve, or safe area loads via a Zener barrier or isolator. The two galvanically isolated, solid state voltage free outputs may be independently conditioned as speed or run-time alarms with normally open or closed outputs. Annunciators on the BA314G display show the status of both alarm outputs.

Other field mounting tachometers include the BA314E which has the same functions as the BA314G, but incorporates a separate terminal compartment and supersedes the BA364D.

For installation in Zone 2 or 22 the BA314NG, which has the same functions as the BA314G, has Ex nA and Ex tc certification allowing installation without Zener barriers or galvanic isolators.

Panel mounting tachometers with similar specifications are available in a variety of sizes and material for use in hazardous and safe areas.

BA314G

One input tachometer

Intrinsically safe for use in all gas & dust hazardous areas

- ◆ **Configurable input:** magnetic pick-off, switch contact, proximity detector, open collector or voltage pulse.
- ◆ **Separate speed and run-time displays.**
- ◆ **Intrinsically safe**
- ◆ **IP66 GRP enclosure**
- ◆ **Isolated pulse output**
- ◆ **Simple on-site scale card installation.**
- ◆ **Optional:** Backlight
Dual alarms
4/20mA output
- ◆ **3 year guarantee**



BEKA


associates

Sales & Support Distributor:-Stockshed Limited, Stonecroft House, Mud Lane, Eversley, Hampshire. RG27 0QS. U.K. Tel. (0118) 9734955 e-mail info@stockshed.com


SPECIFICATION

Power supply	
Voltage	10 to 28V from a Zener barrier or galvanic isolator
Current	16mA max plus 16mA for optional backlight.
Input	
Switch contact	Lower 100Ω Upper 1kΩ
Proximity detector (NAMUR)	1.2mA 2.1mA
Open collector	2kΩ 10kΩ
Magnetic pick-off	0 +40mV
Voltage pulse (low)	1V 3V 28V max
Voltage pulse (high)	3V 10V 28V max
Frequency	150Hz typical } <i>Depends upon pulse width and debounce setting.</i> 100kHz max 0.01Hz min
Switch contact	
Other inputs	
All inputs	
Display	
Type	Liquid crystal
Zero blanking	Blanked apart from 0 in front of decimal point
Speed	8 digits 18mm high
Decimal point	1 of 7 positions or absent
Run-time	6 digits 12mm high, 99999.9 hours max
Grand total run-time	5 x 10 ⁶ hours max
Remote reset	
	Contact closure with resistance less than 10kΩ
Pulse output	
Frequency	Isolated open collector 5kHz max, synchronous with input pulse, or divisible with selectable pulse width. 1, 10, 100, 1000 or 10000
Divisible by	0.1, 0.5, 1, 2.5, 5, 10, 25, 50, 100, 250 or 500ms.
Pulse width	51Ω + 3V max
Ron	1MΩ min
Roff	10mA
I max	
Configurable functions	
Speed scale factor	Adjustable between 0.0001 and 99999 pulses / revolution.
Speed timebase	Speed may be displayed per second, minute or hour
Intrinsic safety	
Europe ATEX	
Code	Group II Category 1G Ex ia IIC T5 Ga -40 ≤ Ta ≤ 70°C Group II Category 1D Ex ia IIIC T80°C Da -40 ≤ Ta ≤ 60°C ITS16ATEX28408X
Cert. No.	
International IECEx	
Code	Ex ia IIC T5 Ga -40 ≤ Ta ≤ 70°C Ex ia IIIC T80°C Da -40 ≤ Ta ≤ 60°C IECEx ITS 16.0004X
Cert. No.	
ETL & cETL	
Code	Class I Div 1 Gp A, B, C, D T5 Class II Div 1 Gp E, F, G Class III Class I Zone 0 AEx ia IIC T5 Ga Zone 20 AEx ia IIIC T80°C Da Ex ia IIC T5 Ga Ex ia IIIC T80°C Da -40°C ≤ Ta ≤ 70°C
	} USA & Canada } USA } Canada
Nonincendive USA & Canada ETL & cETL	
Code	Class I Div 2 Gp A, B, C, D T5 Class II Div 2 Gp F, G Class III Div 2 -40°C ≤ Ta ≤ 70°C 4008610
ETL Control No.	
Environmental	
Operating temp	-40 to +70°C display -20 to +70°C
Storage temp	-40 to +85°C
Humidity	to 95% at 40°C non condensing
Vibration	Report available
Enclosure	
Material	GRP
Ingress	IP66
EMC	Complies with 2014/30/EU
Mechanical	
Terminals	Screw clamp for 0.5 to 1.5mm ²
Weight	1.1kg
Accessories	
Backlight	Green LED internally powered
4/20mA output	Isolated current sink 5 to 28V
Voltage drop	
Dual alarms	Two alarms each of which may be independently configured as a speed or run-time, high or low alarm with a NO or NC output.
Outputs	Isolated single pole, voltage free solid state switch 5Ω + 0.7V max 1MΩ min
Ron	
Roff	
Scale card	Blank card fitted to all instruments. Can be supplied printed with specified units of measurement and tag information for no additional charge at time of purchase. #

DIMENSIONS (mm)

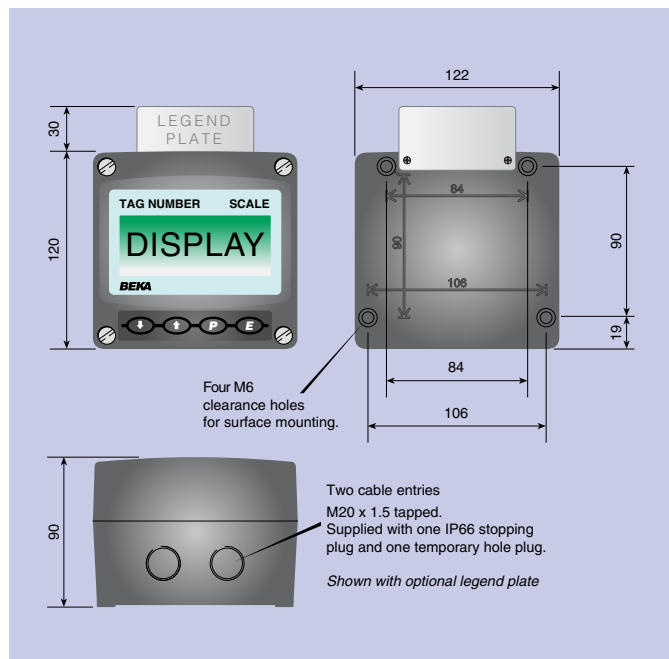

TERMINAL CONNECTIONS

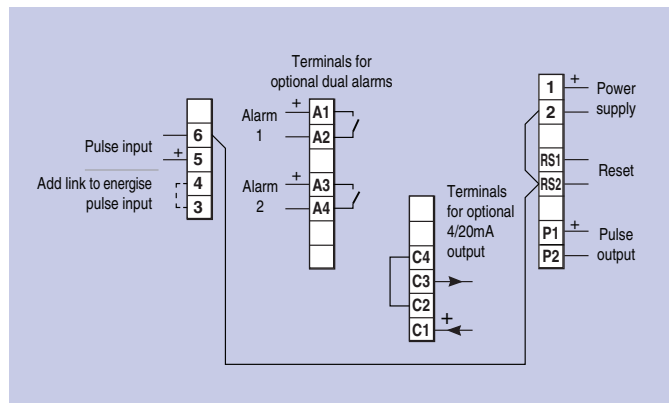

Legend plate	Stainless steel plate laser engraved with tag number or application information attached to rear of the instrument, visible from the front. #
Pipe mounting kit	BA393G 316 stainless steel #
Panel mounting kits	BA394G 316 stainless steel not sealing # BA494G GRP sealing #

See accessory datasheet for details

HOW TO ORDER

Model number	Please specify BA314G
Input	Type *
Speed scale factor	XXXXX *
Speed timebase	Seconds, minutes or hours*
Accessories	Please specify if required
Display backlight	Backlight
4/20mA output	4/20mA output
Dual alarms	Alarms
Scale card marking	Legend required
Units	Legend required
Tag	No charge if ordered with tachometer
Stainless legend plate	Legend required
Pipe mounting kit	BA393G
Panel mounting kit	BA394G or BA494G

* Tachometer can be supplied configured as required for no additional charge. If configuration information is not supplied, instrument will be configured for open collector input with speed scaling factor of 1.0 and a timebase of minutes with direct pulse retransmission. Can easily be reconfigured on-site.